




## Diesel Generator Set

# 16V2000 DS1100

Air charge-air cooling/1100kVA/50 Hz/  
standby power (fuel consumption optimized)/380 - 415V

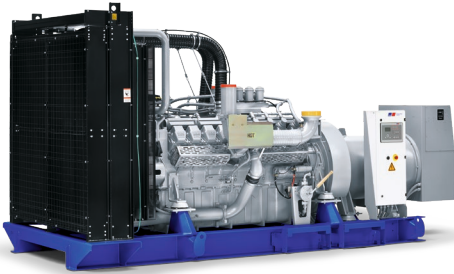

Optional equipment shown. Standard equipment and colors (base frame, generator: grey, engine: blue) may vary.

## Product highlights

### Benefits

- Industry-leading average load factor
- Outstanding fuel economy
- Optimized maintenance intervals
- Low installation costs
- Best-in-class reliability and availability
- Lifting vertically or with diagonal pull
- Compact design

## System ratings<sup>1)</sup>

| Standby power   | 16V2000 DS1100 | 16V2000 DS1100 | 16V2000 DS1100 |
|-----------------|----------------|----------------|----------------|
| Voltage (L-L)   | 380V           | 400V           | 415V           |
| Phase           | 3              | 3              | 3              |
| PF              | 0.8            | 0.8            | 0.8            |
| Hz              | 50             | 50             | 50             |
| kW              | 880            | 880            | 840            |
| kVA             | 1100           | 1100           | 1050           |
| Amps            | 1671           | 1588           | 1461           |
| Generator model | 575RSL7074     | 575RSL7074     | 575RSL7074     |
| Temp rise       | 150°C/40°C     | 150°C/40°C     | 150°C/40°C     |
| Connection      | 6 LEAD HI WYE  | 6 LEAD HI WYE  | 6 LEAD HI WYE  |

1 Power available up to 40°C/400 m

## Certifications and standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 9001:2008 and ISO 14001:2004
- Performance Assurance Certification (PAC)
  - Engine-generator set tested according to ISO 8528-5 for transient response
  - Verified product design, quality and performance integrity
  - All engine systems are prototype and factory tested
- Power rating
  - Permissible average power output during 24 hours of operation up to 85%

## Standard equipment <sup>1)</sup>

### Engine

- Air filters
- Oil pump for draining
- Full flow oil filters
- Closed crankcase ventilation
- Jacket water pump
- Thermostats
- Exhaust manifold – dry
- Belt driven radiator fan
- Radiator – unit mounted
- Electric starting motor – 24V
- Governor – electronic isochronous
- Base – formed steel
- SAE flywheel & bell housing
- Charging alternator
- Flexible fuel connectors
- Flexible exhaust connection

### Generator

- NEMA MG1, IEEE and ANSI standards compliance for temperature rise and motor
- VDE 0530, IEC 60034-1, BS 4999, BS 5000, CSA 22.2-100, AS 1359
- Sustained short circuit current of up to 250% of the rated current for up to 10 seconds
- Self-ventilated and drip-proof IP23
- Superior voltage waveform
- Digital, volts-per-hertz regulator
- No load to full load regulation
- Brushless alternator with brushless pilot exciter
- 4 Pole, rotating field
- 150 °C maximum standby temperature rise
- Heavy duty shielded ball bearings with a minimum B-10 life of 40,000 hrs
- Flexible coupling
- Full amortisseur windings
- 3-phase voltage sensing
- ±0.25% voltage regulation
- 100% of rated load – one step according to NFPA 110
- 3% maximum harmonic content

## Standard features <sup>1)</sup>

- The engine-generator set complies to G3
- Engine generator set tested according to ISO 8528-5 for transient response
- Accepts rated load in one step as per NFPA 110
- All engine-generator sets are type and factory tested
- Global product support
- Cooling System (integral set-mounted; engine driven fan)
- 16V2000 diesel engine (31,84 liter (1943 cu inch) displacement; 4-stroke)
- Engine-generator resiliently mounted
- Complete range of accessories
- Brushless, rotating field generator (PMG excitation; 250% short circuit capability; 2/3 pitch stator windings)
- Complete system metering
- LCD display

## Application data

### Engine

|                                    |                        |
|------------------------------------|------------------------|
| Manufacturer                       | MTU                    |
| Model                              | 16V2000G65TD           |
| Type                               | 4-stroke               |
| Arrangement                        | 16V                    |
| Displacement/cylinder: l (cu inch) | 1.99 (121)             |
| Bore: mm (inch)                    | 130 (5.1)              |
| Stroke: mm (inch)                  | 150 (5.9)              |
| Compression ratio                  | 16:1                   |
| Rated speed: rpm                   | 1500                   |
| Engine governor                    | electronic isochronous |
| Max power: kWm (bhp)               | 975 (1307)             |
| Speed regulation                   | ±0.25%                 |
| Air filter                         | dry                    |

### Lube oil capacity

|                           |          |
|---------------------------|----------|
| Total oil system: l (gal) | 102 (27) |
|---------------------------|----------|

### Electrical

|  |      |
|--|------|
| Electric Volts DC                      | 24   |
| Cold cranking amps under -17.8°C (0°F) | 1000 |

### Fuel system

|                                |                                    |
|--------------------------------|------------------------------------|
| Fuel supply connection size    | M22 x 1,5 - 60°/male               |
| Fuel return connection size    | M12 x 1,5 - 60°/male               |
| Maximum fuel lift: m (ft)      | 5 (16)                             |
| Recommended fuel               | see MTU fluids & lubrication spec. |
| Total fuel flow: l/hr (gal/hr) | 600 (159)                          |

### Fuel consumption<sup>1)</sup>

|                          | gal/hr | l/hr | g/kwh |
|--------------------------|--------|------|-------|
| At 100% of power rating: | 62     | 234  | 199   |
| At 75% of power rating:  | 45     | 172  | 195   |
| At 50% of power rating:  | 31     | 116  | 198   |

### Cooling/radiator system

|   |                                |
|---|--------------------------------|
| Ambient capacity of radiator: °C  | 40 (optional 50) <sup>2)</sup> |
| Max. restriction of cooling air, intake, and discharge side of rad.: kPa (in. H <sub>2</sub> O) | 0,2 (0,803)                    |
| Water pump capacity: l/min (gpm)  | 667 (176)                      |
| Heat rejection to coolant: kW (BTUM)  | 420 (23,885)                   |
| Heat rejection to after cooler: kW (BTUM)   | 200 (11,374)                   |
| Heat radiated to ambient: kW (BTUM)   | 45 (2,559)                     |
| Engine coolant capacity: l (gal)  | 110 (29)                       |
| Coolant to cooler temperature: °C (°F)  | 95 (203)                       |

### Air requirements<sup>3)</sup>

|   |              |
|---|--------------|
| Aspirating: m <sup>3</sup> /min (SCFM)                      | 72 (2540)    |
| Air flow required for rad. cooled unit: m <sup>3</sup> /min | 1236 (43606) |

### Exhaust system


|  |            |
|--|------------|
| Gas temp. (stack): °C (°F)                       | 535 (995)  |
| Gas volume flow temp: m <sup>3</sup> /min (SCFM) | 198 (6985) |
| Maximum allowable back pressure: kPa             | 8,5 (34)   |

1 Values in accordance with ISO 3046-1. Conversion calculated with fuel density of 0.83 g/ml.

2 System ratings at 50°C may differ.

3 Air density = 1.184 kg/m<sup>3</sup> (0.0739 lbm/ft<sup>3</sup>)

## Weights and dimensions

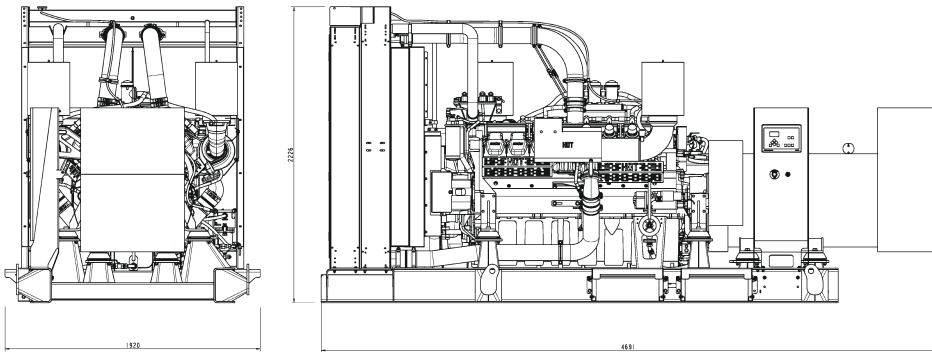

Drawing above for illustration purposes only, based on standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

| System                | Dimensions (L x W x H)                     | Weight (dry/less tank) |
|-----------------------|--|------------------------|
| Open power unit (OPU) | 4691 x 1920 x 2226 mm (185 x 76 x 88 inch) | 6388 kg (14,084 lbs)   |

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific engine-generator set.

## Sound data

– Consult your local MTU distributor for sound data.

## Emissions data

– Consult your local MTU distributor for emissions data.

## Rating definitions and conditions

- Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. No overload capability for this rating. Ratings are in accordance with ISO 8528-1, ISO-3046-1, BS 5514 and AS 2789. Average load factor: ≤ 85%. Operating hours/year: max. 500.
- Consult your local MTU distributor for derating information.