

# Diesel Generator Set

# MTU 20V4000 DS3100

380V – 11 kV/50 Hz/data center continuous power/fuel consumption optimized/20V4000G24F/water charge air cooling



Optional equipment and finishing shown. Standard may vary.

# Product highlights

#### **Benefits**

- Low fuel consumption
- Optimized system integration ability
- High reliability
- High availability of power
- Long maintenance intervals

#### Suppor

- Global product support offered

#### Standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 2008:9001 and ISO 2004:14001
- Generator set complies to ISO 8528
- Generator meets NEMA MG1, BS5000, ISO, DIN EN and IEC standards
- NFPA 110

#### Power rating

- System ratings: 2900 kVA 2910 kVA
- Accepts rated load in one step per NFPA 110
- Generator set complies to G3 according to ISO 8528-5
- Generator set exceeds load steps according to ISO 8528-5

#### Performance assurance certification (PAC)

- Engine-generator set tested to ISO 8528-5 for transient response
- 100% load factor
- Verified product design, quality and performance integrity
- All engine systems are prototype and factory tested

#### Complete range of accessories available

- Control panel
- Power panel
- Circuit breaker/power distribution
- Fuel system
- Fuel connections with shut-off valve mounted to base frame
- Starting/charging system
- Exhaust system
- Mechanical and electrical driven radiators
- Medium and oversized voltage alternators

#### **Emissions**

Fuel consumption optimized

#### Certifications

- CE certification option
- Unit certificate acc. to BDEW (German Grid-Code)



# Application data 1)

Engine			Liquid capacity (lubrication)	
Manufacturer		MTU	Total oil system capacity: l	390
Model	20V	4000G24F	Engine jacket water capacity: l	205
Туре		4-cycle	Intercooler coolant capacity: I	50
Arrangement		20V		
Displacement: l		95.4	Combustion air requirements	
Bore: mm		170	Combustion air volume: m³/s	2.7
Stroke: mm		210	Max. air intake restriction: mbar	50
Compression ratio		16.4		
Rated speed: rpm		1500	Cooling/radiator system	
Engine governor		ECU 9	Coolant flow rate (HT circuit): m³/hr	80
Max power: kWm		2420	Coolant flow rate (LT circuit): m³/hr	32.5
Air cleaner		Dry	Heat rejection to coolant: kW	890
			Heat radiated to charge air cooling: kW	350
Fuel system			Heat radiated to ambient: kW	105
Maximum fuel lift: m		5	Fan power for electr. radiator (40°C): kW	70
Total fuel flow: I/min		27		
			Exhaust system	
Fuel consumption 2)	l/hr	g/kwh	Exhaust gas temp. (after turbocharger): °C	560
At 100% of power rating:	554	190	Exhaust gas volume: m³/s	7.1
At 75% of power rating:	422	193	Maximum allowable back pressure: mbar	85
At 50% of power rating:	294.5	202	Minimum allowable back pressure: mbar	30

# Standard and optional features

## System ratings (kW/kVA)

Generator model	Voltage	Fuel consumption optimized						
			without radiator			with mechanical radiator		
		kWel	kVA*	AMPS	kWel	kVA*	AMPS	
Leroy Somer LSA53.2 M12 (Low voltage Leroy Somer standard)	380 V	2328	2910	4421	2264	2830	4300	
	400 V	2328	2910	4200	2264	2830	4085	
	415 V	2328	2910	4048	2264	2830	3937	
Marathon 1030FDL7094 (Low voltage Marathon)	380 V	2328	2910	4421	2256	2820	4285	
	400 V	2320	2900	4186	2256	2820	4070	
	415 V	2320	2900	4034	2256	2820	3923	
Marathon 1030FDH7101 (Medium volt. marathon)	11 kV	2320	2900	152	2256	2820	148	
Leroy Somer LSA53.2 ZL14 (Medium volt. Leroy Somer)	11 kV	2328	2910	153	2264	2830	149	

<sup>\*</sup> cos phi = 0.8

All data refers only to the engine and is based on ISO standard conditions (25°C and 100m above sea level).

<sup>2</sup> Values referenced are in accordance with ISO 3046-1. Conversion calculated with fuel density of 0.83 g/ml. All fuel consumption values refer to rated engine power.


### Standard and optional features


- **Engine** ■ 4-Cycle ■ Closed crankcase ventilation with ■ Common rail fuel injection Standard single stage air filter improved oil seperator ■ Fuel consumption optimized engine Oil drain extension & shut-off valve ■ Governor-electronic isochronous Centrifugal oil filter Generator ■ 4 pole three-phase synchronous Radio suppression EN55011, group 1, cl. B ■ Meets NEMA MG-1, BS 5000, ■ Short circuit capability 3xln for 10sec IEC 60034-1. VDE 0530. generator Brushless, self-excited, self-regulating, ■ Winding and bearing RTDs DIN EN 12601, AS1359 and ISO 8528 self-ventilated (without monitoring) requirements ■ Digital voltage regulator ■ Excitation by AREP Leroy Somer low voltage generator ■ Mounting of CT's: 2 core CT's Anti condensation heater ☐ Marathon low voltage generator ■ Stator winding Y-connected, accessible ■ Winding pitch: 2/3 winding □ Oversized generator neutral (brought out) ■ Voltage setpoint adjustment ± 10% ☐ Medium voltage generator ■ Protection IP23 ■ Insulation class H, utilization acc. to H Cooling system Jacket water pump ☐ Mechanical radiator ■ Thermostat(s) ☐ Electrical driven front-end cooler Water charge air cooling ☐ Jacket water heater Control panel Pre-wired control cabinet for easy ☐ Mains parallel operation of Event recording application of customized controller (V1+) multiple gensets (V7) ■ IP 54 front panel rating with ☐ Island operation (V2) ☐ Basler controller integrated gasket ☐ Automatic mains failure operation with ATS ☐ Different expansion modules ☐ Deif controller (V3a) ■ Complete system metering ☐ Remote annunciator ☐ Automatic mains failure operation Digital metering ☐ Daytank control incl. control of generator and mains Engine parameters ☐ Generator winding temperature breaker (V3b) Generator protection functions monitoring ☐ Island parallel operation of multiple ■ Engine protection ☐ Generator bearing temperature gensets (V4) ■ SAE J1939 engine ECU monitoring  $\ \square$  Automatic mains failure operation with communications ☐ Modbus TCP-IP short (< 10s) mains parallel Parametrization software overlap synchronization (V5) Multilingual capability ☐ Mains parallel operation of ■ Multiple programmable contact inputs a single genset (V6) ■ Multiple contact outputs Power panel ☐ Available in 600x600 and 600x1000 ☐ Supply for anti condensation heating ☐ Supply for electrical driven radiator ☐ Phase monitoring relay 230V/400V ☐ Plug socket cabinet for 230V from 45kW - 75kW (PP 600x1000) ☐ Supply for battery charger compatible Euro/USA ☐ Supply for jacket water heater
- Represents standard features
- Represents optional features

# Standard and optional features

Circuit breaker/power distribution			
☐ 3-pole circuit breaker ☐ 4-pole circuit breaker	☐ Manual-actuated circuit breaker☐ Electrical-actuated circuit breaker	☐ Stand-alone solution in seperate cabinet	
Fuel system			
<ul> <li>Flexible fuel connectors mounted to base frame</li> <li>Fuel filter with water separator</li> <li>Fuel filter with water separator heavy-duty</li> </ul>	<ul> <li>Switchable fuel filter with water separator</li> <li>Switchable fuel filter with water separator heavy-duty</li> <li>Seperate fuel cooler</li> </ul>	☐ Fuel cooler integrated into cooling equipment	
Starting/charging system			
■ 24V starter	☐ Starter batteries, cables, rack, disconnect switch	☐ Battery charger	
Mounting system			
■ Welded base frame	Resilient engine and generator mounting	■ Modular base frame design	
Exhaust system			
<ul> <li>Exhaust bellows with connection flange</li> <li>Exhaust silencer with 10 dB(A) sound attenuation</li> </ul>	<ul><li>□ Exhaust silencer with</li><li>30 dB(A) sound attenuation</li><li>□ Exhaust silencer with</li><li>40 dB(A) sound attenuation</li></ul>	☐ Y-connection-pipe	

## Weights and dimensions



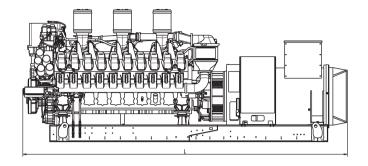

Drawing above for illustration purposes only, based on a standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

System	Dimensions (LxWxH)	Weight (dry/less tank)		
Open power unit (OPU)	5760 x 1887 x 2332 mm	15819 kg		

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific engine-generator set.

#### Sound data

- Consult your local MTU distributor for sound data.

#### **Emissions data**

- Consult your local MTU distributor for emissions data.

# Rating definitions and conditions

- Data Center Continuous Power ratings apply to Data Center installations where a reliable utility power is available and comply with Uptime Institute Tier III and IV requirements. At constant or varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO 8528-1, ISO 3046-1, BS 5514 and AS 2789. Average load factor: ≤ 100%.
- Consult your local MTU distributor for derating information.